


# P-K WATER STORAGE TANKS

Rep Name: \_\_\_\_\_  
 Phone Number: \_\_\_\_\_  
 Email: \_\_\_\_\_  
 Date: \_\_\_\_\_ / \_\_\_\_\_ / \_\_\_\_\_

Model capacities 80 through 200 gallons

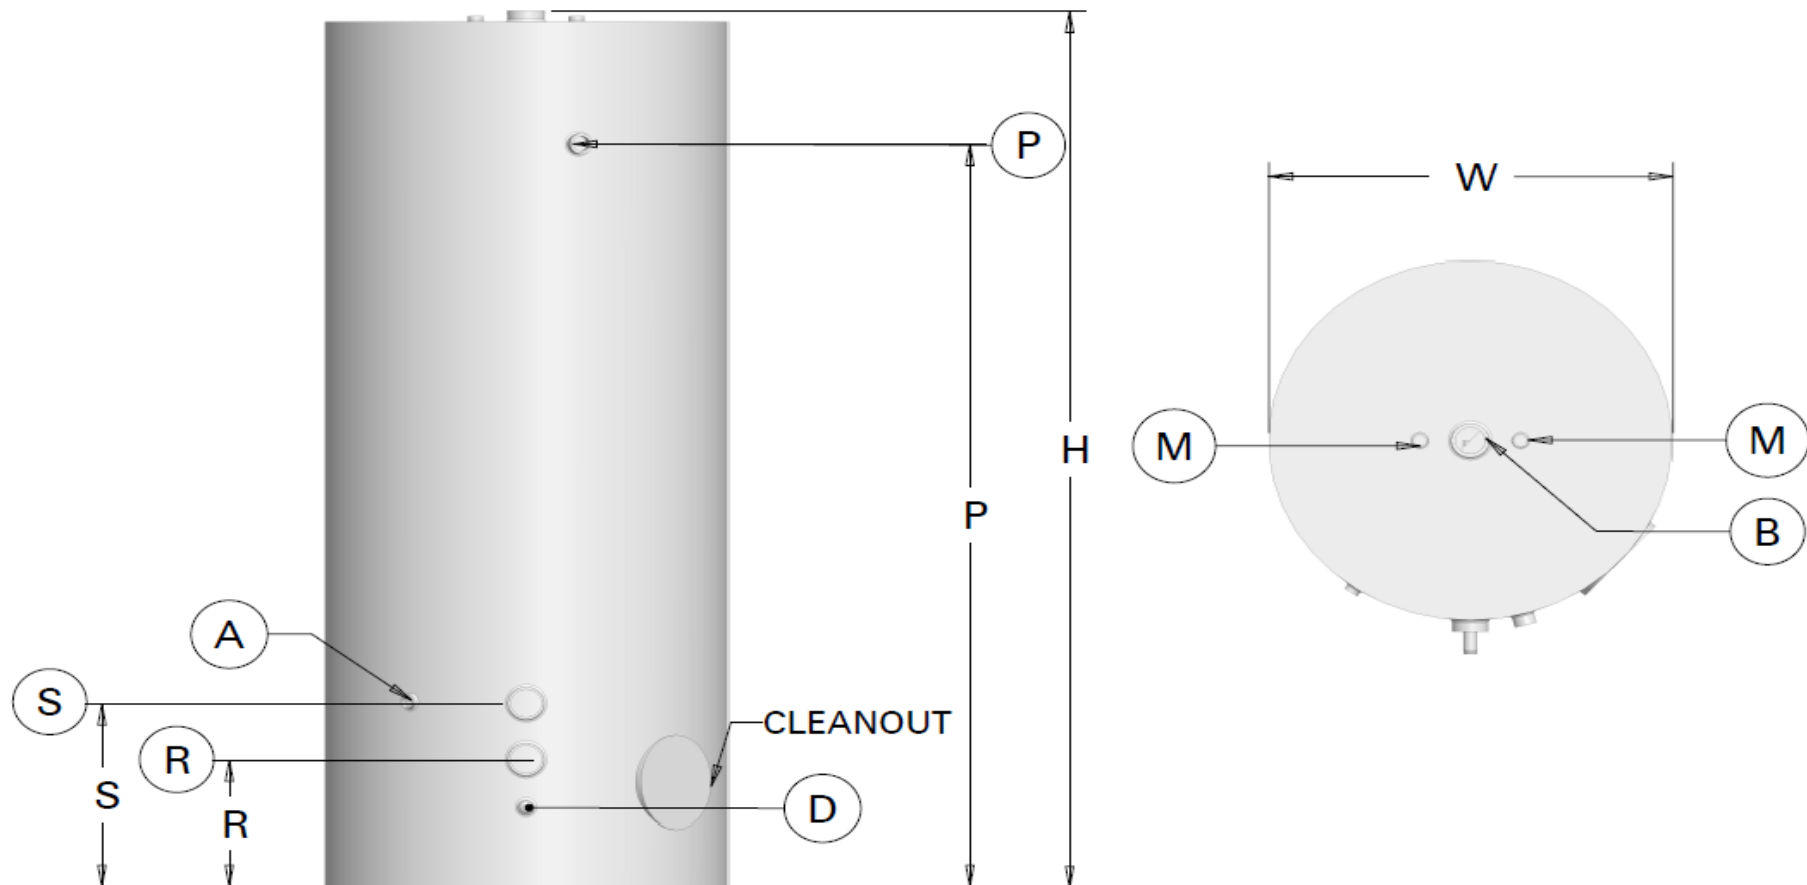

Appliance dimensions				
Appliance Connections		80 gal	119 gal	200 gal
A	Aquastat / Tank Sensor	3/4" NPT		
B	Building Supply	2" NPT	2-1/2" NPT	
D	Drain	3/4" NPT		1" NPT
M	Magnesium Anode Rod	3/4" NPT		
P	Pressure Relief Valve	1" NPT		
R	Domestic Water Return	2" NPT	2-1/2" NPT	
S	Domestic Water Supply	2" NPT	2-1/2" NPT	
Appliance dimensions				
H	Height (overall)	59-3/4"	63-1/2"	78"
P	Pressure Relief Valve	52-1/2"	55-3/4"	66"
R	Domestic Water Return	9-1/4"	9-1/4"	11-1/4"
S	Domestic Water Supply	14-1/4"	14-1/4"	16-1/4"
W	Width (overall)	24"	28"	32"

Recommended Safety Relief Valve or Temperature & Pressure Relief Valves	
Shipped Loose for Field Installation (select only one)	
Safety relief valves	
<input type="checkbox"/> 30 PSIG 3/4" FPT x 3/4" FPT	<input type="checkbox"/> 30 PSIG 1" FPT x 1" FPT
<input type="checkbox"/> 50 PSIG 3/4" FPT x 3/4" FPT	<input type="checkbox"/> 50 PSIG 1" FPT x 1" FPT
<input type="checkbox"/> 60 PSIG 3/4" FPT x 3/4" FPT	<input type="checkbox"/> 60 PSIG 1" FPT x 1" FPT
<input type="checkbox"/> 75 PSIG 3/4" FPT x 3/4" FPT	<input type="checkbox"/> 75 PSIG 1" FPT x 1" FPT
<input type="checkbox"/> 80 PSIG 3/4" FPT x 3/4" FPT	<input type="checkbox"/> 80 PSIG 1" FPT x 1" FPT
<input type="checkbox"/> 100 PSIG 3/4" FPT x 3/4" FPT	<input type="checkbox"/> 100 PSIG 1" FPT x 1" FPT
<input type="checkbox"/> 125 PSIG 3/4" FPT x 3/4" FPT	<input type="checkbox"/> 125 PSIG 1" FPT x 1" FPT
<input type="checkbox"/> 150 PSIG 3/4" FPT x 3/4" FPT	<input type="checkbox"/> 150 PSIG 1" FPT x 1" FPT
Temperature & Pressure relief valves	
<input type="checkbox"/> 125 PSIG 3/4" FPT x 3/4" FPT @ 210° with 8" Element	
<input type="checkbox"/> 125 PSIG 1" FPT x 1" FPT @ 210° with 8" Element	
<input type="checkbox"/> 150 PSIG 3/4" FPT x 3/4" FPT @ 210° with 8" Element	
<input type="checkbox"/> 150 PSIG 1" FPT x 1" FPT @ 210° with 8" Element	

A.S.M.E Section IV Design Data - "HLW" Stamp	
Maximum Pressure	150 psig
Maximum Temperature	180°F
Materials of construction	Glass-lined carbon steel

Recommended Clearance for Service Access <sup>†</sup>	
80 gallons	Front - 6"   Rear - 6"   Top - 51"   Right Side - 6"   Left Side - 6"
119 gallons	
200 gallons	

<sup>†</sup> Refer to Installation and Owner's Manual for complete clearance dimension details

Approximate Shipping Weights	
80 gallons	200 lbs
119 gallons	225 lbs
200 gallons	550 lbs